



60" x 36" Shower Base with Offset RH or LH Drain SB-60x36-OSXH-LC

Estimated Wt. 170 lbs (77kg) IMI LiteCast™


Technical Specifications

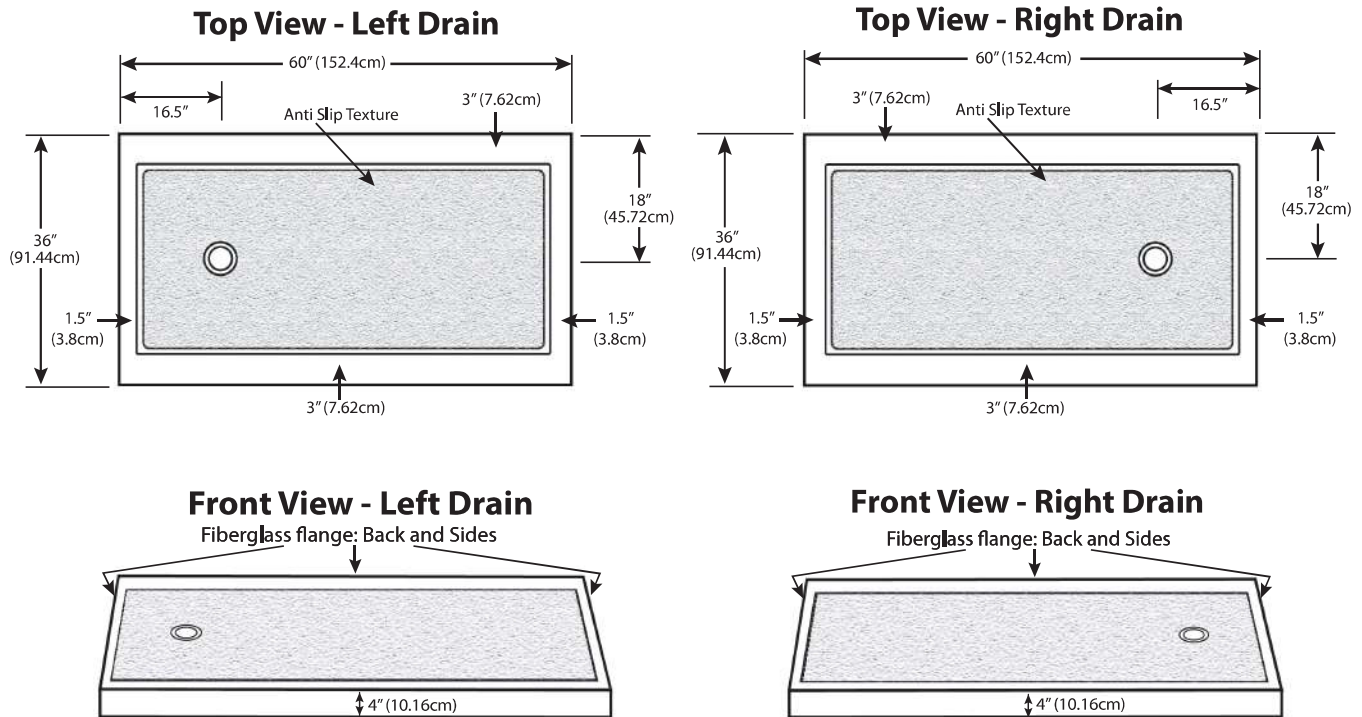


Side View of Curb



Drain Details: (U.S.)



Flange Details: (U.S.)



Standard Features:

- Available in Left Hand and Right Hand version
- Fiberglass Flange
- 3" (7.62cm) Wide thresholds on front
- Solid one-piece construction
- Pre-leveled, rests on subfloor
- Mold and mildew resistant
- Bacteria resistant
- "Grout-free" and non-porous
- Stain resistant and easy to clean
- Waterproof and leakproof

Suggested Drains:



Solvent Weld type fitting similar to Oatey Part No. 42097



Compression type "No-Caulk" fitting similar to Oatey Part No. 42099



Note: Base dimensions may vary +/- 1/8"

Our products comply with one or more of the following: IAPMO, ANSI, HUD, NAHB, NHQ

22 42 23 (Div 22)

Revised: 2018.06.20

© 2018 Copyright IMI International Marble Industries, Inc.